

MODEL:

PDUMVR30NET

Switched Rackmount PDU



Low Voltage
Input/Output



24 Outlets



30A Max Capacity



Multimode
Load Meter



Network
Interface




0U Rackmount




Toolless
Mounting
Buttons

- A** Digital Load Meter
- B** 5-15/20R Outlets with On/Off LEDs
- C** 20A Circuit Breakers
- D** Removable Cord Retention Brackets
- E** Removable Mounting Brackets
- F** Toolless Mounting Buttons with Removable 90° Rotation Brackets
- G** 10 ft. Input Power Cord
- H** L5-30P Twist-Lock Input Plug
- I** Durable Metal Case
- J** Network Interface
- K** RJ45 Ethernet Jack
- L** Manual Configuration Port
- M** Environmental Monitoring Port
- N** Network Interface Reset Button




AC Input Connection: Insert L5-30P twist-lock plug into compatible L5-30R utility, generator or UPS outlet.

Also Includes: Cable Ties,
Owner's Manual

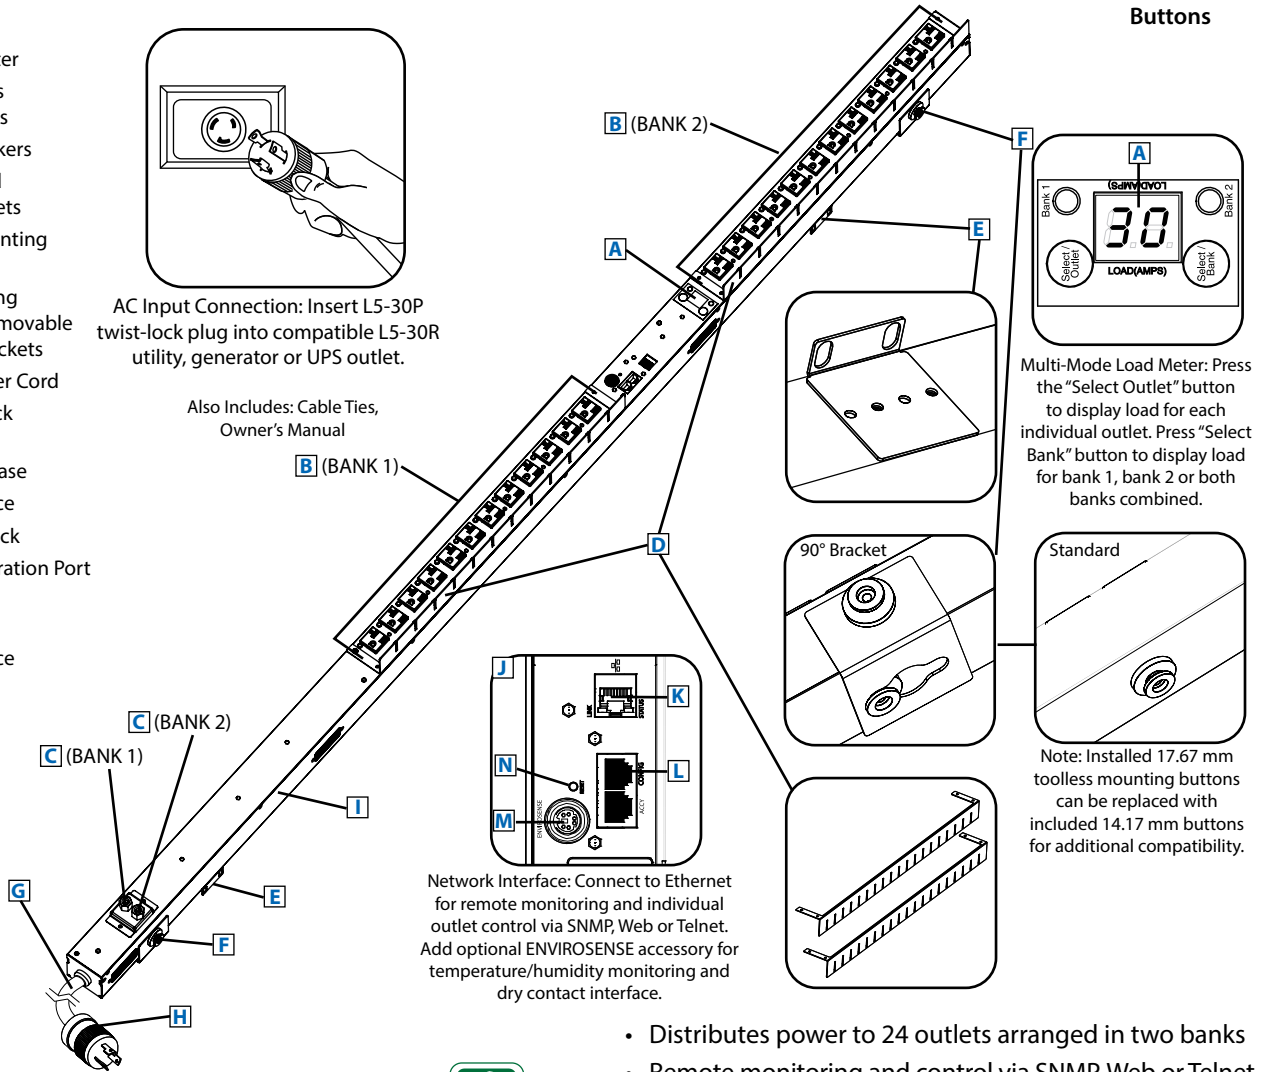

Multi-Mode Load Meter: Press the "Select Outlet" button to display load for each individual outlet. Press "Select Bank" button to display load for bank 1, bank 2 or both banks combined.



Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.

Network Interface: Connect to Ethernet for remote monitoring and individual outlet control via SNMP, Web or Telnet. Add optional ENVIROSENSE accessory for temperature/humidity monitoring and dry contact interface.

Specifications

Model	PDUMVR30NET
Voltage	100-125V
Frequency	50/60 Hz
Maximum Capacity	30A
Agency-Derated Capacity	24A
Input Connector	L5-30P
Cord Length	10 ft.
Outlets	24 (5-15/20R)
Primary Mounting Option	0U (Vertical) Rackmount
Unit Weight & Dimensions	9.94 lb / 70 x 2.20 x 2.05 (HWD in inches) <i>See next page for detailed unit measurements.</i>
Regulatory Compliance	Meets UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A and RoHS standards

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

- Distributes power to 24 outlets arranged in two banks
- Remote monitoring and control via SNMP, Web or Telnet
- Displays load for each individual outlet, load bank or both load banks combined in real time.
- Perfect for rackmount server, network and telecom applications

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com

