

### SECTORED AND WIDE-ANGLE COVERAGE DIRECTIONAL ANTENNA

Laird's 12 dBi gain, 90° "Wide H-plane" sectored antenna offers the systems integrator both an antenna for use with sectorized base stations and a wide area coverage directional antenna for use where a wide directional pattern characteristic would be preferable to an omnidirectional pattern characteristic. Enclosed in an attractive, UV-stable weatherproof radome, it is both attractive enough to satisfy indoor aesthetic requirements and rugged enough to withstand outdoor exposures.

Anywhere from one to four of the 90° sectored antennas can be deployed at a base station site depending on the area coverage that is called for and single antennas can be mounted to a wall or mast to provide wide area directional coverage. The TM905BRK mechanical down-tilt mount can be used to mount the antenna to a mast and can also be used to customize the antenna pattern tilt whether mounting to a mast or a wall surface. The design is both electrically and mechanically robust ensuring a lifetime of stable, trouble-free service and predictable, reliable, consistent performance.


The standard antenna comes with a 12 inch low-loss coax pigtail and N female connector. Alternative coax cable lengths and connector types are also available.

### FEATURES

- Wide 90° H-plane coverage
- Indoor/outdoor antenna
- Tilt and articulating mounts available
- Low visibility housing

### MARKETS

- WiMAX

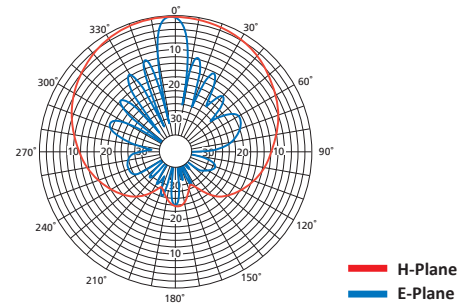

S2401290P

PARAMETER	S2401290P12NF	S1851290P12NF	S1711290P12NF
Frequency (MHz)	2400-2500	1850-1990	1710-1880
Gain (dBi)	12	12	12
VSWR	2.0:1	2.0:1	2.0:1
Polarization	Linear	Linear	Linear
-3dB Beamwidth E-Plane	10°	10°	10°
-3dB Beamwidth H-Plane	90°	90°	90°
RF connector (f)	N	N	N
Dimensions in (cm)	3 x 26 x 1 (7.6 x 66 x 2.5)	34 x 3 x 1.2 (86.4 x 7.6 x 3.0)	34 x 3 x 12 (86.4 x 7.6 x 3.0)
Mount	Wall / Mast	Wall / Mast	Wall / Mast
Power (Watts)	50	50	50
Weight lb (kg)	1.0 (.45)	1.6 (.73)	1.6 (.73)

Americas: +1.847.839.6907  
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941  
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127  
IAS-AsiaSales@lairdtech.com

[www.lairdtech.com](http://www.lairdtech.com)

ANT-DS-S2401290P 0115

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.