

## Bus system cable - VS-PNRJ45-PNRJ45R-93B-1,0 - 1418248

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Profinet patch cable, shielded, star-quad, 22 AWG stranded (7-wire), green, straight RJ45 male connector/IP20 to angled RJ45 male connector/IP20, length: 1.0 m

Profinet patch cable



### Key commercial data

|                        |   |
|------------------------|---|
| Packing unit           | 0   |
| Minimum order quantity | 1   |
| Catalog page           | Page 319 (PC-2011)  |
| GTIN                   | <br>4 046356 534475 |
| Custom tariff number   | 85444210  |
| Country of origin      | POLAND  |

### Technical data

#### Mechanical characteristics

|                                 |                  |
|---------------------------------|------------------|
| Number of positions             | 4                |
| Connection profile              | RJ45 8(4)        |
| Insertion/withdrawal cycles     | ≥ 750            |
| Type of cable                   | Round cable      |
| Length of cable                 | 1 m              |
| Ambient temperature (operation) | -25 °C ... 80 °C |

#### Material data

|   |        |
|---|--------|
| Inflammability class according to UL 94 | V2     |
| Housing material                        | PA 6.6 |
| Contact material                        | CuSn   |
| Contact surface material                | Ni/Au  |
| Degree of protection                    | IP20   |

#### Electrical characteristics

|               |        |
|---------------|--------|
| Rated current | 1.75 A |
|---------------|--------|

#### Line characteristics

# Bus system cable - VS-PNRJ45-PNRJ45R-93B-1,0 - 1418248

## Technical data

### Line characteristics

|   |  |
|---|--|
| Cable type                              | PROFINET                                     |
| Cable structure                         | 1x4xAWG22/7; SF/Q                            |
| Conductor cross section                 | 0.34 mm <sup>2</sup>                         |
| AWG signal line                         | 22   |
| Conductor structure signal line         | 7x 0.25 mm                                   |
| Core diameter including insulation      | Approx. 1.5 mm                               |
| External cable diameter                 | 6.50 mm                                      |
| Wire colors                             | White, yellow, blue, orange                  |
| External sheath, color                  | Green RAL 6018                               |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001) |
| Wave impedance                          | 100 Ω ± 15 Ω (At 1- 100 MHz)                 |
| Outer sheath, material                  | PVC  |
| Conductor material                      | Tin-plated Cu litz wires                     |

## Classifications

### eclass

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |

### etim

|          |          |
|----------|----------|
| ETIM 4.0 | EC002599 |
|----------|----------|


### unspsc

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 26121616 |
| UNSPSC 7.0901 | 26121616 |
| UNSPSC 11     | 26121604 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 26121616 |

## Drawings


# Bus system cable - VS-PNRJ45-PNRJ45R-93B-1,0 - 1418248

Dimensioned drawing



RJ45 plug connector, IP20

Dimensioned drawing

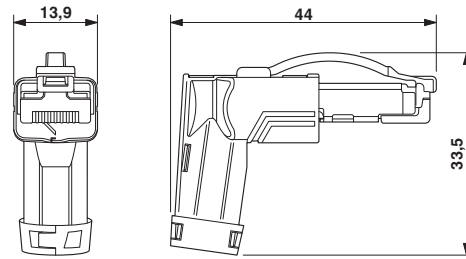

RJ45 plug-in connector, IP20, angled

# Bus system cable - VS-PNRJ45-PNRJ45R-93B-1,0 - 1418248

Circuit diagram

