


NOTES:

1. METALSHELLS: COPPER ALLOY; min. 315µin TIN over 40-80µin NICKEL
2. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
3. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- ④ 4. JACKSCREW: STAINLESS STEEL 1.4305
5. WIRE ROPE: STAINLESS STEEL 1.4401
6. RETAINING WASHER: STAINLESS STEEL 1.4122
7. TERMINAL RING: UNINSULATED, COPPER ALLOY; min. 200µinTIN over 80µin NICKEL
8. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
9. CONNECTOR IS PART MARKED: PART NO. CONEC ABC

Directive 2002/95/EC
"RoHS"
Compliant

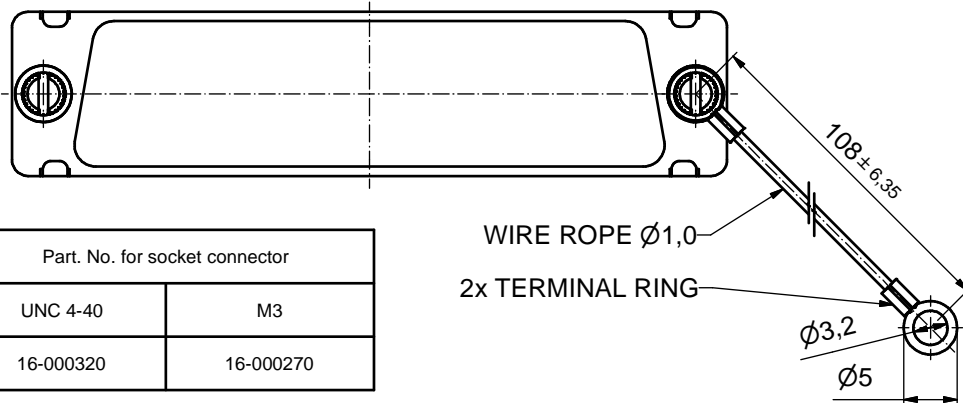

Part. No. for socket connector	
UNC 4-40	M3
16-000320	16-000270

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance	ISO 2768-m		dim. in mm	scale:	2:1 (5:1)	
	date	name			material:	SEE NOTES	
	drawn	23.05.08	Petker		title:	SCREEN CAP 50pos. FOR SOCKET CONNECTOR with threaded insert, jackscrew and wire rope	
	appd.	26.05.08	Fischer		dwg no:		
norm							
d-old							
1 x b	Ä 3186	17.11.2008	Petker			part no: 16K1A2303	
a	Origin						
rev.	description	date	name			see table	